


PETG Mirrored sheet

PETG Mirror offers versatile fabrication properties with good impact strength, good design flexibility and speed of fabrication.

PETG Mirror is available in 0.5mm to 3mm in 2440mm x 1220mm sheet. The thinner gauge sheet is ideal for the fabrication of children's toys, cosmetic uses and office supplies.

PETG Mirror is supplied in 1 sided poly film or paper mask 1 or 2 sides. Call for quotation, availability and delivery information.

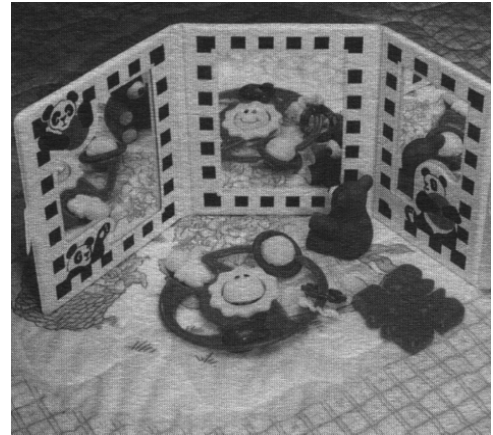

Property	ASTM Method	Units	All Grades
Specific Gravity	D-792	—	1.27
Gardner Impact Strength	D-256	—	No break 300 in/lbs.
Flexural Strength	D-790	psi	11,240
Flexural Modulus	D-790	psi	309,000
Tensile Strength	D-638	psi	6,990
Tensile Modulus	D-638	psi	301,000
Elongation .125 in. thick	—	%	75
Dielectric Constant	D-150	@100Hz	3.46
Dielectric Strength	D-149	volts/mil	420
Volume Resistivity	D-257	ohms/cm	6.0 x 10 ¹⁵
Heat Distortion Temp	D-648	°F	145
Vicat Softening point	D-1525	°F	180
Coefficient of Thermal Expansion	D-696	in/in/°F	0.00003

